

# Speed Queen®

Shepard Street, Ripon, WI 54971 1-800-345-5649

## Softmount Extractor

- Variable speed drive handles a wide variety of fabric types
- Heavy duty suspension absorbs vibrations without the need for special foundations
- Automatic supply injection reduces detergent waste and provides more consistent laundry results
- Stainless steel construction means the washer finish won't corrode with normal use
- High G Force reduces drying time



## High spin speed


Since all fabrics have different extract speed requirements, our line of softmount washer-extractors has variable extract speeds. A low extract speed is ideal for synthetics, permanent press and blends. A mid-range extract speed is perfect for mattress pads, blankets and spreads. A high extract speed is preferred for terry and cotton items. A higher G-Force during extraction lowers the water retention of the fabrics being processed. Lower water retention also reduces the gas or electricity used during the drying process, saving money on utilities and improving customer turnover.

## Easy installation

Speed Queen's 18 lb and 30 lb capacity softmount washer-extractors fit through 36" door openings. Softmount washer-extractors require no additional cement base, making installation easier and less costly.

## Superior suspension

Extensive engineering efforts have developed a heavy-duty suspension system designed for superior washing performance and absorbing out-of-balance load vibrations without the need for special foundations.

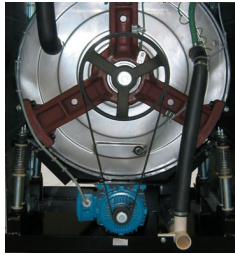

## Stainless quality


Our rugged steel cabinet and top construction resists corrosion with normal use; it's also extremely rust resistant. This makes the SX a reliable performer for your on-premises laundry.



## Flexible control

Our advanced microprocessor control is designed to offer eight pre-programmed cycles.

These cycles can be customized to fit your specific needs.

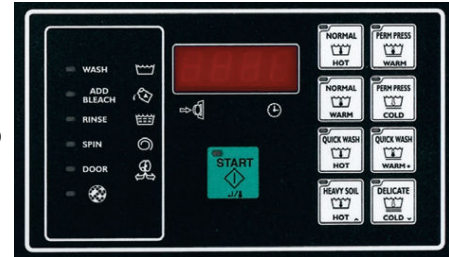

Customized cycles can significantly reduce water consumption and turnaround time by doing the maximum amount of cleaning in the shortest

amount of time. The micro control is easy to operate, utilizing a separate start pad and cycle symbols designed to match garment care labels.

## Softmount Washer-Extractors Specifications

	SX18	SX30
Capacity - lb (kg)	18 (8.2)	30 (13.6)
Cylinder Volume - cu ft (liters)	2.68 (76)	4.66 (132)
Cylinder Diameter - in (mm)	20 7/8" (530)	25 9/16" (650)
Cylinder Depth - in (mm)	13" (330)	15 3/4" (400)
Door Opening Size - in (mm)	11 13/16" (300)	11 13/16" (300)
Wash Speed - RPM	10-50	10-50
Distribution Speed - RPM	85	85
Extract Speed - RPM	500-1000	250-1000
Extract G-Force	206	380
Water Inlet Connection - in (mm)	3 x 3/4" (19)	3 x 3/4" (19)
Drain Connection Size - in (mm)	2" (50)	2" (50)
Motor Size - HP (kW)	1 (.75)	2 (1.5)
Voltage/Hz/Phase - Nonheat	200-240/50-60/1-3	200-240/50-60/1-3
Circuit Breaker	15	15
Voltage/Hz/Phase* Electric Heat	200-240/50-60/3	200-240/50-60/3
Circuit Breaker	30	60
Voltage/Hz/Phase* Nonheat	380-415/50-60/3	380-415/50-60/3
Circuit Breaker	15	15
Voltage/Hz/Phase	380-415/50-60/3	380-415/50-60/3
Circuit Breaker	20	40
Width - in (mm)	26" (660)	30 1/16" (780)
Depth - in (mm)	31 5/16" (796)	35 3/8" (898)
Height - in (mm)	39 13/16" (1011)	46 1/4" (1175)
Weight - lb (kg)	48.1 (218)	728 (330)
Shipping Weight - lb (kg)	51.4 (233)	789 (358)
Agency Approval	CE, ETL, ULc	CE, ETL, ULc